


(ch3. MCS-51

hjlee@dongseo.ac.kr
<http://crypto.dongseo.ac.kr>
<http://kowon.dongseo.ac.kr/~hjlee>


1

3.1 (1) - 80C51 Program Memory

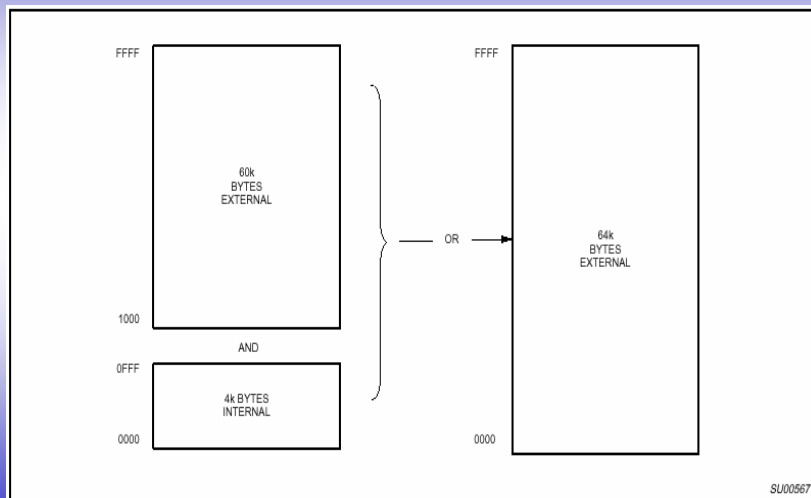


2

3.1 (2) - 80C51 Data Memory

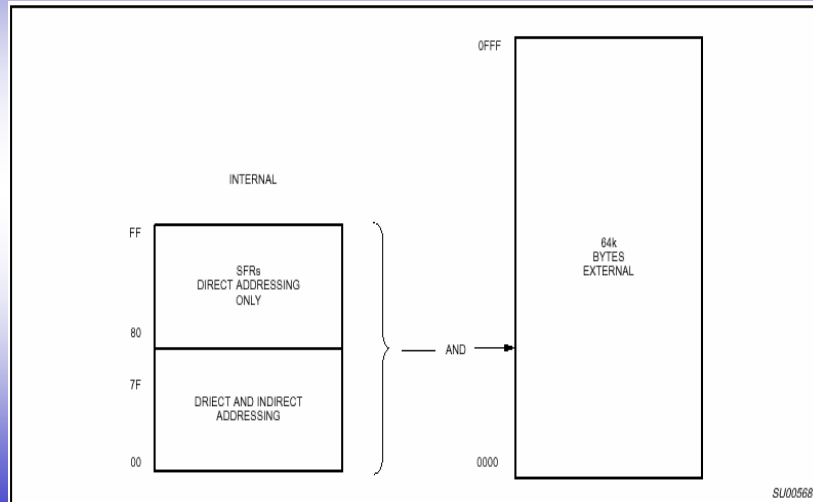

3

3.1 (3) - 128 Bytes of RAM Direct and Indirect Addressable

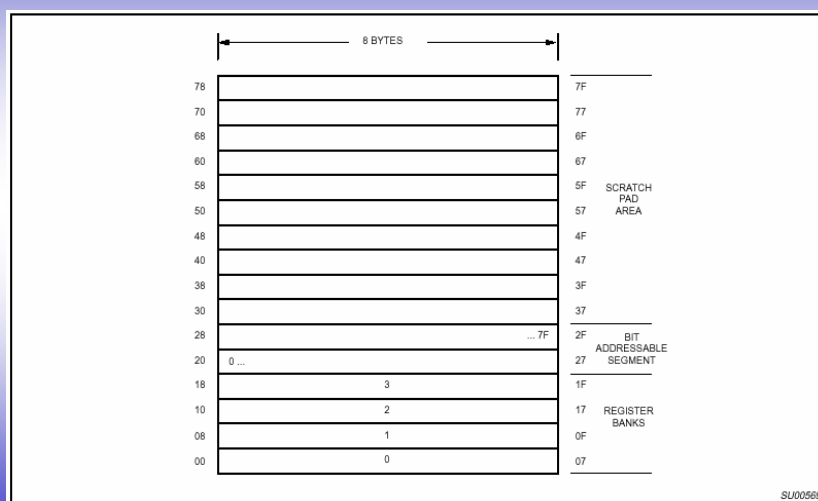

4

3.1 (4) - 80C51 Special Function Registers

SYMBOL	DESCRIPTION	DIRECT ADDRESS	BIT ADDRESS, SYMBOL, OR ALTERNATIVE PORT FUNCTION								RESET VALUE
			MSB							LSB	
ACC*	Accumulator	EDH	E7	E6	E5	E4	E3	E2	E1	E0	00H
B*	B register	FDH	F7	F6	F5	F4	F3	F2	F1	F0	00H
DPTR	Data pointer (2 bytes)										
DPH	Data pointer high	83H									00H
DPL	Data pointer low	82H									00H
IE*	Interrupt enable	A6H	AF	AE	AD	AC	AB	AA	A9	A8	
			EA	—	—	—	EB	ET1	EX1	ET0	EX0
IP*	Interrupt priority	BBH	BF	BE	BD	BC	BB	BA	B9	B8	0x000000B
			—	—	—	—	PD	PT1	PK1	PT0	PK0
P0*	Port 0	80H	87	86	85	84	83	82	81	80	FFH
			AD7	AD6	AD5	AD4	AD3	AD2	AD1	AD0	
P1*	Port 1	90H	97	96	95	94	93	92	91	90	FFH
			—	—	—	—	—	—	T2EX	T2	
P2*	Port 2	A0H	A7	A6	A5	A4	A3	A2	A1	A0	FFH
			A15	A14	A13	A12	A11	A10	A9	A8	
P3*	Port 3	B0H	B7	B6	B5	B4	B3	B2	B1	B0	FFH
			RD	WR	TS	TO	WT	WE	TxD	RxD	
PCON ¹	Power control	87H	SMOD	—	—	—	GF1	GF0	PD	IDL	0x000000B
			D7	D6	D5	D4	D3	D2	D1	D0	
PSW*	Program status word	D0H	CV	AC	F0	RS1	RS0	OV	—	P	00H
SBUF	Serial data buffer	96H									0x000000B
SCON*	Serial controller	96H	9F	9E	9D	9C	9B	9A	99	98	
			SM0	SM1	SM2	REN	TSB	RSB	T1	RI	
SP	Stack pointer	81H									07H
			8F	8E	8D	8C	8B	8A	89	88	
TCON*	Timer control	88H	TF1	TR1	TF0	TR0	IE1	IT1	IE0	IT0	
TH0	Timer High 0	8CH									00H
TH1	Timer High 1	8DH									00H
TL0	Timer Low 0	8AH									00H
TL1	Timer Low 1	8BH									00H
TMOD	Timer mode	89H									00H
			GATE	CT	M1	M0	GATE	CT	M1	M0	


NOTES:

* Bit addressable.

1. Bits GF1, GF0, PD, and IDL of the PCON register are not implemented on the NMOS 8051/8031.

5

3.2 (SFR)(1) - SFR Memory Map

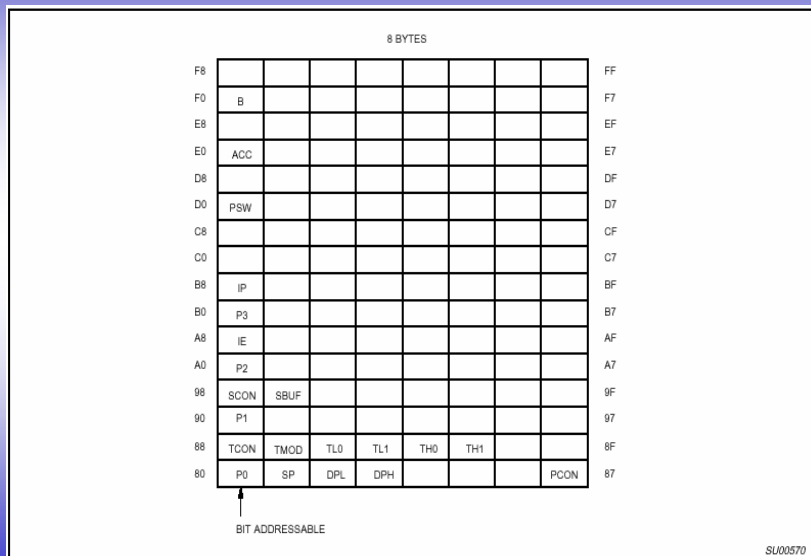

6

3.2 (SFR)(2)

- PSW: PROGRAM STATUS WORD. BIT ADDRESSABLE

CY	AC	F0	RS1	RS0	OV	-	P
----	----	----	-----	-----	----	---	---

CY	PSW.7	Carry Flag.
AC	PSW.6	Auxiliary Carry Flag.
F0	PSW.5	Flag 0 available to the user for general purpose.
RS1	PSW.4	Register Bank selector bit 1 (SEE NOTE 1).
RS0	PSW.3	Register Bank selector bit 0 (SEE NOTE 1).
OV	PSW.2	Overflow Flag.
-	PSW.1	Usable as a general purpose flag.
P	PSW.0	Parity flag. Set/cleared by hardware each instruction cycle to indicate an odd/even number of '1' bus in the accumulator.

NOTE:

1. The value presented by RS0 and RS1 selects the corresponding register bank.

RS1	RS0	REGISTER BANK	ADDRESS
0	0	0	00H-07H
0	1	1	08H-0FH
1	0	2	10H-17H
1	1	3	18H-1FH

7

3.2 (SFR)(3)

- PCON: POWER CONTROL REGISTER. NOT BIT ADDRESSABLE

SMOD	-	-	-	GF1	GF0	PD	IDL
------	---	---	---	-----	-----	----	-----

SMOD Double baud rate bit. If Timer 1 is used to generate baud rate and SMOD = 1, the baud rate is doubled when the Serial Port is used in modes 1, 2, or 3.

- Not implemented, reserved for future use.*

- Not implemented reserved for future use.*

- Not implemented reserved for future use.*

GF1 General purpose flag bit.

GF0 General purpose flag bit.

PD Power Down Bit. Setting this bit activates Power Down operation in the 80C51. (Available only in CMOS.)

IDL Idle mode bit. Setting this bit activates Idle Mode operation in the 80C51. (Available only in CMOS.)

If 1s are written to PD and IDL at the same time, PD takes precedence.

* User software should not write 1s to reserved bits. These bits may be used in future 8051 products to invoke new features.

8

3.2 (SFR)(4) - Interrupts

INTERRUPTS:

To use any of the interrupts in the 80C51 Family, the following three steps must be taken.

1. Set the EA (enable all) bit in the IE register to 1.
2. Set the corresponding individual interrupt enable bit in the IE register to 1.
3. Begin the interrupt service routine at the corresponding Vector Address of that interrupt. See Table below.

INTERRUPT SOURCE	VECTOR ADDRESS
IE0	0003H
TF0	000BH
IE1	0013H
TF1	001BH
RI & TI	0023H

In addition, for external interrupts, pins INT0 and INT1 (P3.2 and P3.3) must be set to 1, and depending on whether the interrupt is to be level or transition activated, bits IT0 or IT1 in the TCON register may need to be set to 1.

ITx = 0 level activated

ITx = 1 transition activated

9

3.2 (SFR)(5) - IE: INTERRUPT ENABLE REGISTER. BIT ADDRESSABLE

IE: INTERRUPT ENABLE REGISTER. BIT ADDRESSABLE.

If the bit is 0, the corresponding interrupt is disabled. If the bit is 1, the corresponding interrupt is enabled.

EA	—	—	ES	ET1	EX1	ET0	EX0
----	---	---	----	-----	-----	-----	-----

EA	IE.7	Disables all interrupts. If EA = 0, no interrupt will be acknowledged. If EA = 1, each interrupt source is individually enabled or disabled by setting or clearing its enable bit.
—	IE.6	Not implemented, reserved for future use.*
—	IE.5	Not implemented, reserved for future use.*
ES	IE.4	Enable or disable the serial port interrupt.
ET1	IE.3	Enable or disable the Timer 1 overflow interrupt.
EX1	IE.2	Enable or disable External Interrupt 1.
ET0	IE.1	Enable or disable the Timer 0 overflow interrupt.
EX0	IE.0	Enable or disable External Interrupt 0.

* User software should not write 1s to reserved bits. These bits may be used in future 80C51 products to invoke new features.

10

3.2 (SFR)(6) - PRIORITY WITHIN LEVEL

PRIORITY WITHIN LEVEL:

Priority within level is only to resolve simultaneous requests of the same priority level.

From high to low, interrupt sources are listed below:

IE0
TF0
IE1
TF1
RI or TI

11

3.2 (SFR)(7) - IP: INTERRUPT PRIORITY REGISTER. BIT ADDRESSABLE

IP: INTERRUPT PRIORITY REGISTER. BIT ADDRESSABLE.

If the bit is 0, the corresponding interrupt has a lower priority and if the bit is 1 the corresponding interrupt has a higher priority.

-	-	-	PS	PT1	PX1	PT0	PX0
---	---	---	----	-----	-----	-----	-----

-	IP.7	Not implemented, reserved for future use.*
-	IP.6	Not implemented, reserved for future use.*
-	IP.5	Not implemented, reserved for future use.*
PS	IP.4	Defines the Serial Port interrupt priority level.
PT1	IP.3	Defines the Timer 1 interrupt priority level.
PX1	IP.2	Defines External Interrupt 1 priority level.
PT0	IP.1	Defines the Timer 0 interrupt priority level.
PX0	IP.0	Defines the External Interrupt 0 priority level.

* User software should not write 1s to reserved bits. These bits may be used in future 80C51 products to invoke new features.

12

3.2 (SFR)(8)

- TCON: TIMER/COUNTER CONTROL REGISTER. BIT ADDRESSABLE

TCON: TIMER/COUNTER CONTROL REGISTER. BIT ADDRESSABLE.

TF1	TR1	TF0	TR0	IE1	IT1	IE0	IT0
TF1	TCON.7	Timer 1 overflow flag. Set by hardware when the Timer/Counter 1 overflows. Cleared by hardware as processor vectors to the interrupt service routine.					
TR1	TCON.6	Timer 1 run control bit. Set/cleared by software to turn Timer/Counter 1 ON/OFF.					
TF0	TCON.5	Timer 0 overflow flag. Set by hardware when the Timer/Counter 0 overflows. Cleared by hardware as processor vectors to the service routine.					
TR0	TCON.4	Timer 0 run control bit. Set/cleared by software to turn Timer/Counter 0 ON/OFF.					
IE1	TCON.3	External Interrupt 1 edge flag. Set by hardware when External Interrupt edge is detected. Cleared by hardware when interrupt is processed.					
IT1	TCON.2	Interrupt 1 type control bit. Set/cleared by software to specify falling edge/low level triggered External Interrupt.					
IE0	TCON.1	External Interrupt 0 edge flag. Set by hardware when External Interrupt edge detected. Cleared by hardware when interrupt is processed.					
IT0	TCON.0	Interrupt 0 type control bit. Set/cleared by software to specify falling edge/low level triggered External Interrupt.					

13

3.2 (SFR)(9)

- TCON: TIMER/COUNTER CONTROL REGISTER. BIT ADDRESSABLE

TMOD: TIMER/COUNTER MODE CONTROL REGISTER. NOT BIT ADDRESSABLE.

GATE	C/T	M1	M0	GATE	C/T	M1	M0
Timer 1				Timer 0			

GATE When TRx (in TCON) is set and GATE = 1, TIMER/COUNTERx will run only while INTx pin is high (hardware control). When GATE = 0, TIMER/COUNTERx will run only while TRx = 1 (software control).

C/T Timer or Counter selector. Cleared for Timer operation (input from internal system clock). Set for Counter operation (input from Tx input pin).

M1 Mode selector bit. (NOTE 1)

M0 Mode selector bit. (NOTE 1)

NOTE 1:

M1	M0	Operating Mode
0	0	0 13-bit Timer (8048 compatible)
0	1	1 16-bit Timer/Counter
1	0	2 8-bit Auto-Reload Timer/Counter
1	1	3 (Timer 0) TL0 is an 8-bit Timer/Counter controlled by the standart Timer 0 control bits. TH0 is an 8-bit Timer and is controlled by Timer 1 control bits.
1	1	3 (Timer 1) Timer/Counter 1 stopped.

14

3.2 (SFR)(10) - TIMER/COUNTER 0

TIMER/COUNTER 0

Table 2. As a Timer:

MODE	TIMER 0 FUNCTION	TMOD	
		INTERNAL CONTROL (NOTE 1)	EXTERNAL CONTROL (NOTE 2)
0	13-bit Timer	00H	08H
1	16-bit Timer	01H	09H
2	8-bit Auto-Reload	02H	0AH
3	Two 8-bit Timers	03H	0BH

Table 3. As a Counter:

MODE	COUNTER 0 FUNCTION	TMOD	
		INTERNAL CONTROL (NOTE 1)	EXTERNAL CONTROL (NOTE 2)
0	13-bit Timer	04H	0CH
1	16-bit Timer	05H	0DH
2	8-bit Auto-Reload	06H	0EH
3	One 8-bit Counter	07H	0FH

NOTES:

1. The timer is turned ON/OFF by setting/clearing bit TR0 in the software.
2. The Timer is turned ON/OFF by the 1-to-0 transition on INT0 (P3.2) when TR0 = 1 (hardware control).

15

3.2 (SFR)(11) - TIMER/COUNTER 1

TIMER/COUNTER 1

Table 4. As a Timer:

MODE	TIMER 1 FUNCTION	TMOD	
		INTERNAL CONTROL (NOTE 1)	EXTERNAL CONTROL (NOTE 2)
0	13-bit Timer	00H	80H
1	16-bit Timer	10H	90H
2	8-bit Auto-Reload	20H	A0H
3	Does not run	30H	B0H

Table 5. As a Counter:

MODE	COUNTER 1 FUNCTION	TMOD	
		INTERNAL CONTROL (NOTE 1)	EXTERNAL CONTROL (NOTE 2)
0	13-bit Timer	40H	C0H
1	16-bit Timer	50H	D0H
2	8-bit Auto-Reload	60H	E0H
3	Not available	—	—

NOTES:

1. The timer is turned ON/OFF by setting/clearing bit TR1 in the software.
2. The Timer is turned ON/OFF by the 1-to-0 transition on INT1 (P3.2) when TR1 = 1 (hardware control).

16

3.2 (SFR)(12)

- SCON: SERIAL PORT CONTROL REGISTER. BIT ADDRESSABLE

SCON: SERIAL PORT CONTROL REGISTER. BIT ADDRESSABLE.

SM0	SM1	SM2	REN	TB8	RB8	TI	RI
-----	-----	-----	-----	-----	-----	----	----

SM0	SCON.7	Serial Port mode specifier. (NOTE 1)					
SM1	SCON.6	Serial Port mode specifier. (NOTE 1)					
SM2	SCON.5	Enables the multiprocessor communication feature in modes 2 & 3. In mode 2 or 3, if SM2 is set to 1 then RI will not be activated if the received 9th data bit (RB8) is 0. In mode 1, if SM2 = 1 then RI will not be activated if a valid stop bit was not received. In mode 0, SM2 should be 0. (See Table 6.)					
REN	SCON.4	Set/Cleared by software to Enable/Disable reception.					
TB8	SCON.3	The 9th bit that will be transmitted in modes 2 & 3. Set/Cleared by software.					
RB8	SCON.2	In modes 2 & 3, is the 9th data bit that was received. In mode 1, if SM2 = 0, RB8 is the stop bit that was received. In mode 0, RB8 is not used.					
TI	SCON.1	Transmit interrupt flag. Set by hardware at the end of the 8th bit time in mode 0, or at the beginning of the stop bit in the other modes. Must be cleared by software.					
RI	SCON.0	Receive interrupt flag. Set by hardware at the end of the 8th bit time in mode 0, or halfway through the stop bit time in the other modes (except see SM2). Must be cleared by software.					

NOTE 1:

SM0	SM1	Mode	Description	Baud Rate
0	0	0	Shift Register	$F_{osc}/12$
0	1	1	8-bit UART	Variable
1	0	2	9-bit UART	$F_{osc}/64$ or $F_{osc}/32$
1	1	3	9-bit UART	Variable

17

3.3 BAUD RATE (1)

- Serial PORT set-up & BAUD RATES

SERIAL PORT SET-UP:

Table 6.

MODE	SCON	SM2 VARIATION
0	10H	Single Processor Environment (SM2 = 0)
1	50H	
2	90H	
3	D0H	
0	NA	Multiprocessor Environment (SM2 = 1)
1	70H	
2	B0H	
3	F0H	

GENERATING BAUD RATES

Serial Port in Mode 0:

Mode 0 has a fixed baud rate which is 1/12 of the oscillator frequency. To run the serial port in this mode none of the Timer/Counters need to be set up. Only the SCON register needs to be defined.

$$\text{Baud Rate} = \frac{\text{Osc Freq}}{12}$$

Serial Port in Mode 1:

Mode 1 has a variable baud rate. The baud rate is generated by Timer 1.

18

3.3 BAUD RATE (2) - Serial PORT set-up & BAUD RATES

USING TIMER/COUNTER 1 TO GENERATE BAUD RATES:

For this purpose, Timer 1 is used in mode 2 (Auto-Reload). Refer to Timer Setup section of this chapter.

$$\text{Baud Rate} = \frac{K}{32} \cdot \frac{\text{Osc Freq}}{12 \cdot [256 - (\text{TH1})]}$$

If SMOD = 0, then K = 1.

If SMOD = 1, then K = 2 (SMOD is in the PCON register).

Most of the time the user knows the baud rate and needs to know the reload value for TH1.

$$\text{TH1} = 256 - \frac{K}{384} \cdot \frac{\text{Osc Freq}}{\text{baud rate}}$$

TH1 must be an integer value. Rounding off TH1 to the nearest integer may not produce the desired baud rate. In this case, the user may have to choose another crystal frequency.

Since the PCON register is not bit addressable, one way to set the bit is logical ORing the PCON register (i.e., ORL PCON, #80H). The address of PCON is 87H.

SERIAL PORT IN MODE 2:

The baud rate is fixed in this mode and is 1/32 or 1/64 of the oscillator frequency, depending on the value of the SMOD bit in the PCON register.

In this mode none of the Timers are used and the clock comes from the internal phase 2 clock.

SMOD = 1, Baud Rate = 1/32 Osc Freq.

SMOD = 0, Baud Rate = 1/64 Osc Freq.

To set the SMOD bit: ORL PCON, #80H. The address of PCON is 87H.

SERIAL PORT IN MODE 3:

The baud rate in mode 3 is variable and sets up exactly the same as in mode 1.

19

3.4 MCS-51 (1) - 80C51 Instruction Set Summary

Interrupt Response Time: Refer to Hardware Description Chapter.

Instructions that Affect Flag Settings⁽¹⁾

Instruction	Flag	Instruction	Flag
	C OV AC		C OV AC
ADD	X X X	CLR C	0
ADDC	X X X	CPL C	X
SUBB	X X X	ANL C, bit	X
MUL	0 X	ANL C, /bit	X
DIV	0 X	ORL C, bit	X
DA	X	ORL C, /bit	X
RRC	X	MOV C, bit	X
RLC	X	CJNE	X
SETB C	1		

⁽¹⁾Note that operations on SFR byte address 208 or bit addresses 209-215 (i.e., the PSW or bits in the PSW) will also affect flag settings.

Notes on instruction set and addressing modes:

Rn	Register R7-R0 of the currently selected Register Bank.
direct	8-bit internal data location's address. This could be an Internal Data RAM location (0-127) or a SFR [i.e., I/O port, control register, status register, etc. (128-255)].
@Ri	8-bit internal data RAM location (0-255) addressed indirectly through register R1 or R0.
#data	8-bit constant included in the instruction.
#data 16	16-bit constant included in the instruction
addr 16	16-bit destination address. Used by LCALL and LJMP. A branch can be anywhere within the 64k-byte Program Memory address space.
addr 11	11-bit destination address. Used by ACALL and AJMP. The branch will be within the same 2k-byte page of program memory as the first byte of the following instruction.
rel	Signed (two's complement) 8-bit offset byte. Used by SJMP and all conditional jumps. Range is -128 to +127 bytes relative to first byte of the following instruction.
bit	Direct Addressed bit in Internal Data RAM or Special Function Register.

20

3.4 MCS-51 (2) - 80C51 Instruction Set Summary

MNEMONIC	DESCRIPTION	BYTE	OSCILLATOR PERIOD
ARITHMETIC OPERATIONS			
ADD A,Rn	Add register to Accumulator	1	12
ADD A,direct	Add direct byte to Accumulator	2	12
ADD A,@Ri	Add indirect RAM to Accumulator	1	12
ADD A,#data	Add immediate data to Accumulator	2	12
ADDC A,Rn	Add register to Accumulator with carry	1	12
ADDC A,direct	Add direct byte to Accumulator with carry	2	12
ADDC A,@Ri	Add indirect RAM to Accumulator with carry	1	12
ADDC A,#data	Add immediate data to A _{CC} with carry	2	12
SUBB A,Rn	Subtract Register from A _{CC} with borrow	1	12
SUBB A,direct	Subtract direct byte from A _{CC} with borrow	2	12
SUBB A,@Ri	Subtract indirect RAM from A _{CC} with borrow	1	12
SUBB A,#data	Subtract immediate data from A _{CC} with borrow	2	12
INC A	Increment Accumulator	1	12
INC Rn	Increment register	1	12

All mnemonics copyrighted © Intel Corporation 1980

21

3.4 MCS-51 (3) - 80C51 Instruction Set Summary

MNEMONIC	DESCRIPTION	BYTE	OSCILLATOR PERIOD
ARITHMETIC OPERATIONS (Continued)			
INC direct	Increment direct byte	2	12
INC @Ri	Increment indirect RAM	1	12
DEC A	Decrement Accumulator	1	12
DEC Rn	Decrement Register	1	12
DEC direct	Decrement direct byte	2	12
DEC @Ri	Decrement indirect RAM	1	12
INC DPTR	Increment Data Pointer	1	24
MUL AB	Multiply A and B	1	48
DIV AB	Divide A by B	1	48
DA A	Decimal Adjust Accumulator	1	12

22

3.4 MCS-51 (4) - 80C51 Instruction Set Summary

LOGICAL OPERATIONS

ANL	A,Rn	AND Register to Accumulator	1	12
ANL	A,direct	AND direct byte to Accumulator	2	12
ANL	A,@Ri	AND indirect RAM to Accumulator	1	12
ANL	A,#data	AND immediate data to Accumulator	2	12
ANL	direct,A	AND Accumulator to direct byte	2	12
ANL	direct,#data	AND immediate data to direct byte	3	24
ORL	A,Rn	OR register to Accumulator	1	12
ORL	A,direct	OR direct byte to Accumulator	2	12
ORL	A,@Ri	OR indirect RAM to Accumulator	1	12
ORL	A,#data	OR immediate data to Accumulator	2	12
ORL	direct,A	OR Accumulator to direct byte	2	12
ORL	direct,#data	OR immediate data to direct byte	3	24
XRL	A,Rn	Exclusive-OR register to Accumulator	1	12
XRL	A,direct	Exclusive-OR direct byte to Accumulator	2	12
XRL	A,@Ri	Exclusive-OR indirect RAM to Accumulator	1	12
XRL	A,#data	Exclusive-OR immediate data to Accumulator	2	12
XRL	direct,A	Exclusive-OR Accumulator to direct byte	2	12
XRL	direct,#data	Exclusive-OR immediate data to direct byte	3	24
CLR	A	Clear Accumulator	1	12
CPL	A	Complement Accumulator	1	12
RL	A	Rotate Accumulator left	1	12
RLC	A	Rotate Accumulator left through the carry	1	12
RR	A	Rotate Accumulator right	1	12
RRC	A	Rotate Accumulator right through the carry	1	12
SWAP	A	Swap nibbles within the Accumulator	1	12

23

3.4 MCS-51 (5) - 80C51 Instruction Set Summary

DATA TRANSFER

MOV	A,Rn	Move register to Accumulator	1	12
MOV	A,direct	Move direct byte to Accumulator	2	12
MOV	A,@Ri	Move indirect RAM to Accumulator	1	12
MOV	A,#data	Move immediate data to Accumulator	2	12
MOV	Rn,A	Move Accumulator to register	1	12
MOV	Rn,direct	Move direct byte to register	2	24
MOV	Rn,#data	Move immediate data to register	2	12
MOV	direct,A	Move Accumulator to direct byte	2	12
MOV	direct,Rn	Move register to direct byte	2	24
MOV	direct,direct	Move direct byte to direct	3	24
MOV	direct,@Ri	Move indirect RAM to direct byte	2	24
MOV	direct,#data	Move immediate data to direct byte	3	24
MOV	@Ri,A	Move Accumulator to indirect RAM	1	12
MOV	@Ri,direct	Move direct byte to indirect RAM	2	24
MOV	@Ri,#data	Move immediate data to indirect RAM	2	12
MOV	DPTR,#data16	Load Data Pointer with a 16-bit constant	3	24
MOVC	A,@A+DPTR	Move Code byte relative to DPTR to A _{CC}	1	24
MOVC	A,@A+PC	Move Code byte relative to PC to A _{CC}	1	24
MOVB	A,@Ri	Move external RAM (8-bit addr) to A _{CC}	1	24
MOVB	A,@DPTR	Move external RAM (16-bit addr) to A _{CC}	1	24
MOVB	A,@Ri,A	Move A _{CC} to external RAM (8-bit addr)	1	24
MOVB	@DPTR,A	Move A _{CC} to external RAM (16-bit addr)	1	24
PUSH	direct	Push direct byte onto stack	2	24
POP	direct	Pop direct byte from stack	2	24
XCH	A,Rn	Exchange register with Accumulator	1	12
XCH	A,direct	Exchange direct byte with Accumulator	2	12
XCH	A,@Ri	Exchange indirect RAM with Accumulator	1	12
XCHD	A,@Ri	Exchange low-order digit indirect RAM with A _{CC}	1	12

24

3.4 MCS-51 (6) - 80C51 Instruction Set Summary

BOOLEAN VARIABLE MANIPULATION

CLR	C	Clear carry	1	12
CLR	bit	Clear direct bit	2	12
SETB	C	Set carry	1	12
SETB	bit	Set direct bit	2	12
CPL	C	Complement carry	1	12
CPL	bit	Complement direct bit	2	12
ANL	C,bit	AND direct bit to carry	2	24
ANL	C,/bit	AND complement of direct bit to carry	2	24
ORL	C,bit	OR direct bit to carry	2	24
ORL	C,/bit	OR complement of direct bit to carry	2	24
MOV	C,bit	Move direct bit to carry	2	12
MOV	bit,C	Move carry to direct bit	2	24
JC	rel	Jump if carry is set	2	24
JNC	rel	Jump if carry not set	2	24
JB	rel	Jump if direct bit is set	3	24
JNB	rel	Jump if direct bit is not set	3	24
JBC	bit,rel	Jump if direct bit is set and clear bit	3	24

25

3.4 MCS-51 (7) - 80C51 Instruction Set Summary

MNEMONIC	DESCRIPTION	BYTE	OSCILLATOR PERIOD	
BOOLEAN VARIABLE MANIPULATION (Continued)				
JB	rel	Jump if direct bit is set	3	24
JNB	rel	Jump if direct bit is not set	3	24
JBC	bit,rel	Jump if direct bit is set and clear bit	3	24
PROGRAM BRANCHING				
ACALL	addr11	Absolute subroutine call	2	24
LCALL	addr16	Long subroutine call	3	24
RET		Return from subroutine	1	24
RETI		Return from interrupt	1	24
AJMP	addr11	Absolute jump	2	24
LJMP	addr16	Long jump	3	24
SJMP	rel	Short jump (relative addr)	2	24
JMP	@A+DPTR	Jump indirect relative to the DPTR	1	24
JZ	rel	Jump if Accumulator is zero	2	24
JNZ	rel	Jump if Accumulator is not zero	2	24
CJNE	A,direct,rel	Compare direct byte to A _{CC} and jump if not equal	3	24
CJNE	A,#data,rel	Compare immediate to A _{CC} and jump if not equal	3	24
CJNE	RN,#data,rel	Compare immediate to register and jump if not equal	3	24
CJNE	@Ri,#data,rel	Compare immediate to indirect and jump if not equal	3	24
DJNZ	Rn,rel	Decrement register and jump if not zero	2	24
DJNZ	direct,rel	Decrement direct byte and jump if not zero	3	24
NOP		No operation	1	12

26